

SUPER WINGS LIFTER MANUAL



20210628

MAIN SCREEN



GAME SETING

---Game Settings---

➤ Parameter Settings

Operating accounts

Hardware test

FactorySet

Exit

Ver:2.0.16

1: PARAMETER SETING

---parameter setting---

▶ CoinValue	1	NeedCoin	1
BonusMarks	1	Gift Num	No Gift
Gift Overlay	Once	Music Volume	5
WaitPlayTime	5	DemoMusic	Open
ReleaseSkills	Auto	ExtraReward	close
GameMode	Time	GameTime	100
ShakeType	rotating		

Default

Save't Exit

Save Exit

Ver:2.0.16

SETING NAME	SPECIFIC PARAMETER
How many scores for one coin	1~5000
How many scores for one game	0 (free) ~100
Reward Scores	1~9999
Reward Numbers	0 (no reward) ~1000
Rewards Accumulate	Accumulate, Not Accumulate
Game Volume	0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10
Game Time	1~300
Time to Play Again	1~120
Demo Music	On, Off

2: Operating Account

---operating accounts---

The system password

0 0 0 0 0 0

determine

Please input a password

exit

Ver:2.0.16

Default Password: 888888

---operating accounts---

current pay 17 Permanent coin 17

current gift 0 permanent gift 0

 Reset current Permanent reset


Please enter password

Exit


Ver:2.0.16

Seting Name	Introduction
Current Reset	Delete the current coin in or coin out
Password Change	Change the default password

3: Hardware Test

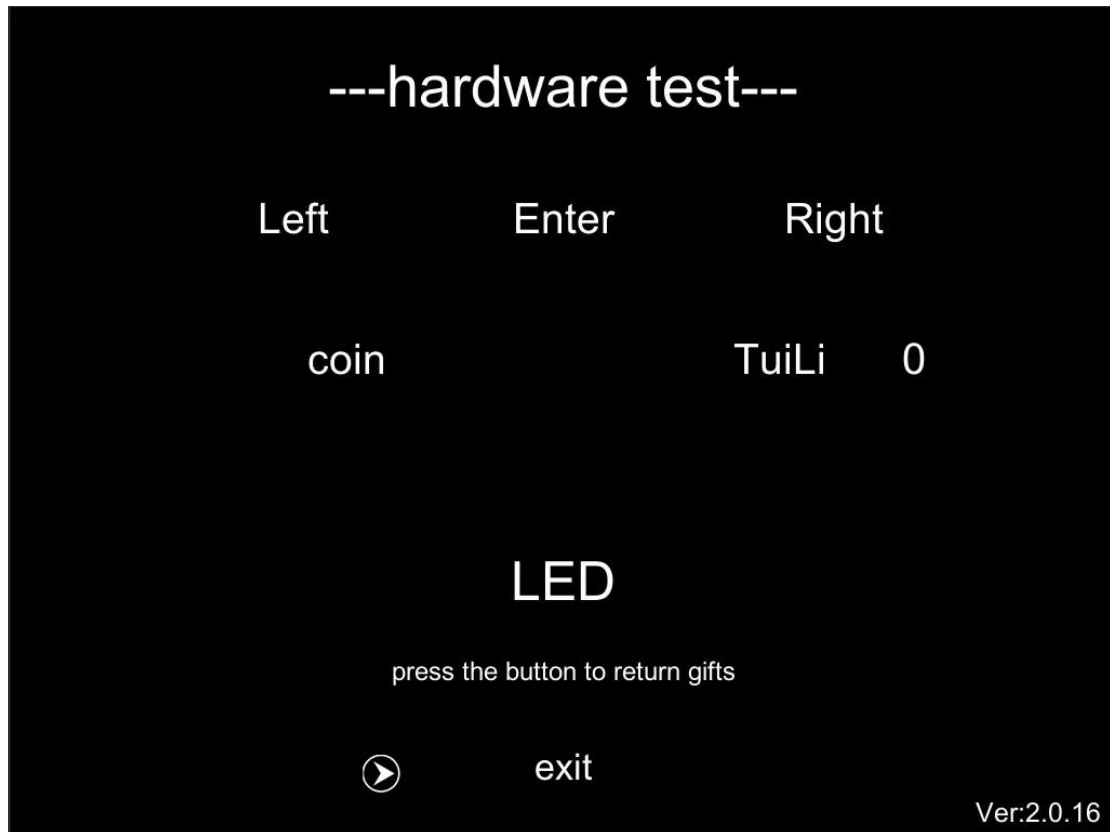

MAINBOARD WIRES CONNECTION

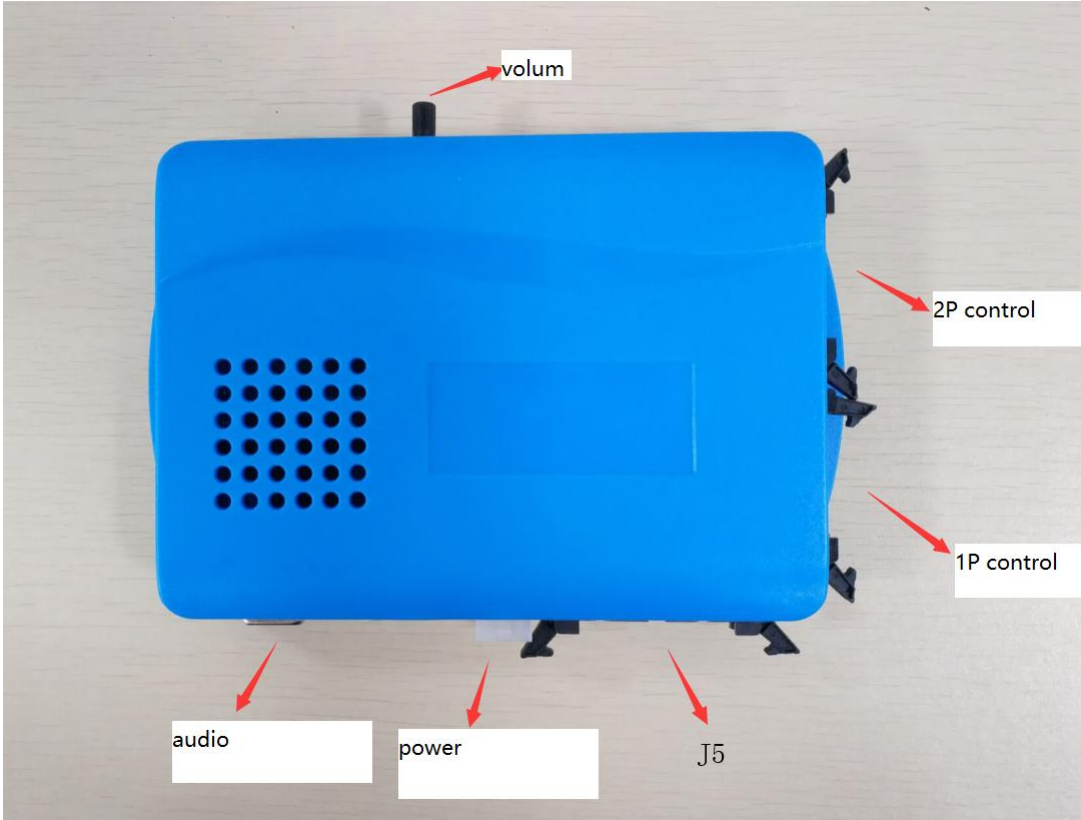

Seat Number	Site	Mark Number	Usage	Note
J6	1	5V	Power Plug	
	2	12V		
	3	24V		

Seat Number	Site	Mark Number	Usage	Note
J5	1	Speaker+	Speaker+	
	2	Speaker-	Speaker-	
	3	MJ+		
	4	GND	GND	
	5	MJ-		
	6	SW1	Up	
	7	SW2	Down	
	8	SW3		
	9	SW4		
	10	SW5	Confirm	
	11	MB1		
	12	GND	GND	
	13	MB2		
	14	12V		
	15	C+1	Coin in Signal 1	
	16	12V	12V	
	17	TBG1		
	18	12V		
	19	C+2		
	20	12V		
	21	TBG2		
	22	24V		
	23	TZ	SSR	
	24	C-	Sensor Signal	
	25	5V	5V	
	26	GND	GND	

Seat Number	Site	Mark Number	Usage	Note
J1	1	IN1	Right Direction	1P Control
	2	5v		
	3	IN2	Confirm	
	4	GND	GND	
	5	IN3	Left Direction	
	6	GND		
	7	IN4	Backtrack	
	8	GND		
	9	IN5		
	10	IN6		
	11	IN7		
	12	IN8		
	13	OUT1	FWD	
	14	12V		
	15	OUT2	REV	
	16	24/12		
	17	AD1		
	18	3V3		
	19	AD2		
	20	GND		